



- 5 节八边形大截面吊臂,全伸臂长 18.6m,大截面支腿,支腿跨距 7.4 米,吊装能力强;
- 垂直支腿行程长,轮胎可离地 50mm,适应环境广;
- 标配柳工 50 吨汽车起重机大功率智能温控散热器,提升液压系统耐久性;
- 集成式电控系统,具有一键启动熄火、过卷报警 + 卸荷、紧急停车、喇叭开关;标配工作灯,夜间作业更方便;标配回转锁销忘插拔提醒功能,可有效保护结构件不受误操作损坏;
- 卷扬采用高压柱塞马达,起重能力更强,双折线卷筒,钢丝绳排列整齐不乱绳;
- 标配原厂后支腿,选配第五支腿;
- 整车高度 3.7 米,通过性能好;东风华神 4*2 底盘(DV3),玉柴 200 马力国六发动机,法士特 8 挡变速箱。280mm 全通三层大梁,承载能力强。可选配其它主流品牌底盘;
- 采用高强度工程版货箱,货箱长 6.1m,宽 2.45m,高 0.55m,载货空间大。


LLC250

随车起重运输车

主要技术参数

Table with 3 columns: Name, Unit, Parameter. Rows include: Rated lifting capacity (10t), Rated lifting torque (250 kN·m), Basic boom length (5.4m), Boom sections (5), Full extension boom length (18.6m), Maximum working radius (18.26m), Maximum lifting height (20m), Amplitude range (0~75°), Rotation angle range (360°), Leg span (7.4m), Recommended system flow (63+40 L/min), System rated pressure (26 MPa), Hydraulic tank capacity (200 L), Crane self-weight (4400 kg).

起升高度曲线图

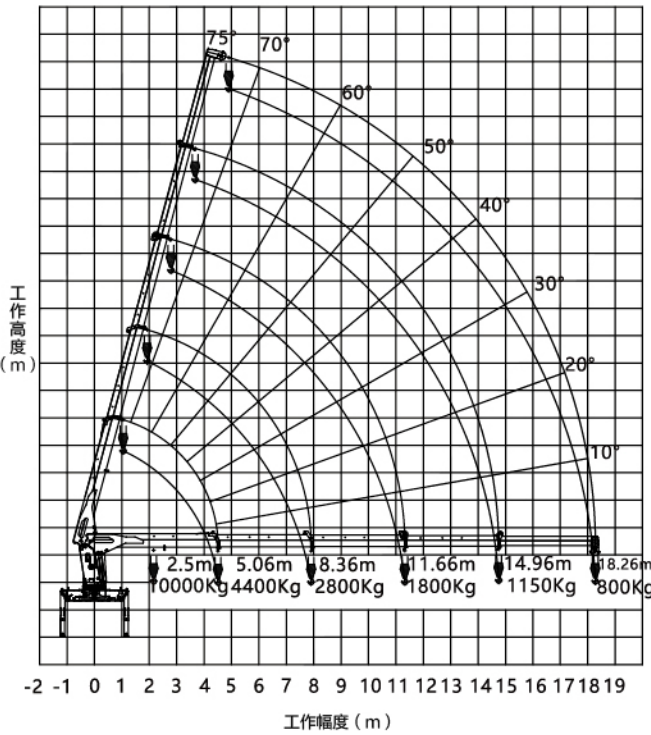

注: 1.最大起升高度(m):支撑车辆地平面至吊钩中心的垂直距离;
2.最大工作幅度(m):回转中心至吊钩中心的水平距离。

起重性能表

单位: kg

Table with 6 columns: Amplitude (m), Boom length (m) (5.4, 8.7, 12, 15.3, 18.6), and lifting capacity. Includes a section for 'Side Rear' (侧后方) and a 'Rate' (倍率) row at the bottom.

吊机尺寸图

单位: mm

